


## OPEN SPELTER SOCKETS WITH PIN

## QUENCHED AND TEMPERED CAST STEEL

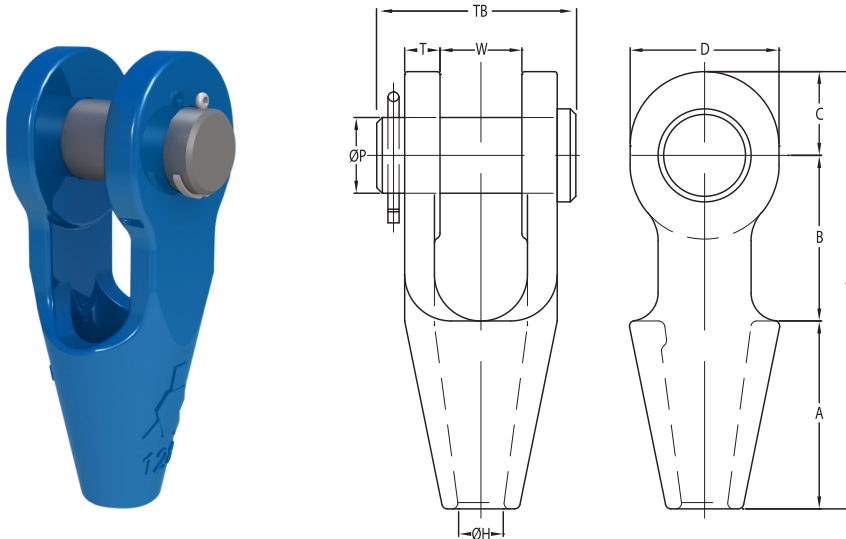

Model nr.	MBL (Mtons)	for wire ø		Strand ø		Dimensions (mm)										Weight (kg)
		(mm)	(inch)	(mm)	(inch)	A	B	C	D	øH	øP	T	TL	TB	W	
OSS 196 P	8	6-7	1/4	-	-	50	40	19	34	9	16	9	109	51	19	0,4
OSS 197 P	12	8-10	3/8	-	-	57	45	22	42	13	21	11	124	63	21	0,7
OSS 198 P	20	11-13	7/16 - 1/2	-	-	64	51	27	50	15	25	12	142	67	25	1
OSS 199 P	25	14-16	9/16 - 5/8	13	1/2	76	63	32	58	18	30	14	171	85	32	1,8
OSS 100 P	40	18-19	3/4	14-16	9/16 - 5/8	89	76	40	70	22	35	16	205	95	38	3
OSS 104 P	55	20-22	7/8	18-19	3/4	101	89	45	80	25	41	19	235	110	44	4,6
OSS 108 P	75	23-26	1	20-22	7/8	114	101	60	104	29	51	22	275	128	51	8
OSS 111 P	90	27-30	1 1/8	23-26	1	127	114	65	114	33	57	25	306	142	57	11
OSS 115 P	125	31-36	1 1/4 - 1 3/8	27-28	1 1/16 - 1 1/8	139	127	72	126	39	63	28	338	155	63	15
OSS 118 P	150	37-39	1 1/2	30-32	1 3/16 - 1 1/4	152	162	80	142	42	70	30	394	177	76	22
OSS 120 P	170	40-42	1 5/8	33-35	1 5/16 - 1 3/8	165	165	88	156	45	76	33	418	187	76	27
OSS 125 P	225	43-48	1 3/4 - 1 7/8	36-40	1 7/16 - 1 5/8	191	178	100	176	52	89	39	469	215	89	41
OSS 128 P	280	49-54	2 - 2 1/8	42-45	1 5/8 - 1 3/4	216	228	108	194	59	95	45	552	244	101	60
OSS 130 P	360	55-60	2 1/4 - 2 3/8	46-48	1 13/16 - 1 7/8	229	254	120	210	64	108	53	603	275	113	88
OSS 132 P	425	61-68	2 1/2 - 2 5/8	50-54	2 - 2 1/8	248	273	133	236	75	121	60	654	300	127	118
OSS 135 P	460	69-75	2 3/4 - 2 7/8	56-62	2 1/4 - 2 1/2	279	279	138	240	81	127	73	696	335	133	155
OSS 138 P	560	76-80	3 - 3 1/8	64-67	2 1/2 - 2 5/8	305	286	146	252	88	133	76	737	355	146	186
OSS 140 P	625	81-86	3 1/4 - 3 3/8	69-76	2 3/4 - 3	330	298	160	290	92	140	79	788	375	159	227
OSS 142 P	720	87-93	3 1/2 - 3 5/8	78-86	3 1/16 - 3 3/8	356	318	178	320	99	152	83	852	400	171	283
OSS 144 P	875	94-102	3 3/4 - 4	88-96	3 7/16 - 3 3/4	381	343	190	350	108	178	89	914	435	191	374
OSS 146 P	1200	108-115	4 1/4 - 4 1/2	98-110	3 7/8 - 4 5/16	450	480	215	400	129	195	100	1145	465	205	539
OSS 150 P	1400	120-130	4 3/4 - 5	112-124	4 7/16 - 4 7/8	500	500	250	450	147	220	110	1250	525	225	761
OSS 155 P	1600	135-140	5 1/4 - 5 1/2	125-132	4 15/16 - 5 1/16	540	497	263	480	157	240	140	1300	590	230	1067
OSS 160 P	2000	142-153	5 3/4 - 6	133-143	5 1/4 - 5 5/8	585	505	275	500	171	255	140	1365	610	250	1172
OSS 165 P	2220	154-165	6 1/4 - 6 1/2	144-154	5 11/16 - 6 1/4	630	530	300	550	185	275	150	1460	640	260	1441
OSS 170 P	2500	166-178	6 3/4 - 7	155-166	6 1/4 - 6 3/4	680	570	310	570	199	295	150	1560	660	280	1615
OSS 175 P	2800	180-191	7 1/4 - 7 1/2	167-179	6 9/16 - 7 1/16	725	600	325	600	213	310	155	1650	689	300	1907
OSS 180 P	3200	192-204	7 3/4 - 8	180-191	7 1/4 - 7 1/2	775	620	345	640	229	330	160	1740	720	320	2239

MBL = Minimum Breaking Load

- The standard finish of our sockets is blue. Hot dipped galvanized is also available.
- Socket range OSS 196 until OSS 100 is delivered with galvanized finish, other finishes are available upon request.
- All sockets are provided with an EN 10204-2.1 declaration of conformity, EN 10204-3.1 material certificate and can be provided with a 2006/42/EC declaration where applicable.
- Dimensional tolerances depend on the manufacturing techniques applied and are different between machined components (pins) and cast components (socket bodies and wedges).
- Also surface finish e.g. hot dip galvanizing or even paint may add to the overall thickness and fork distance.
- Please contact Ropeblock for further guidance and a detailed dimensional tolerance sheet.



SEE OUR WARNING & SAFETY INFORMATION