


Technical data

Average fill factor	0,728
average spinning loss factor	0,82
Core	steel core compacted
Lay type	Ordinary lay
Lay direction	choice of right hand or left hand
Compacting	strands compacted – thereby extra wear resistant
Finish	choice of bright or galvanised
Rope diameter tolerance	+2/+4%

Diameter range	Number of load bearing wires within the outer strands	RCN according ISO 4309
from 6,4 – 15	152	04
from 16 – 18	208	09

WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

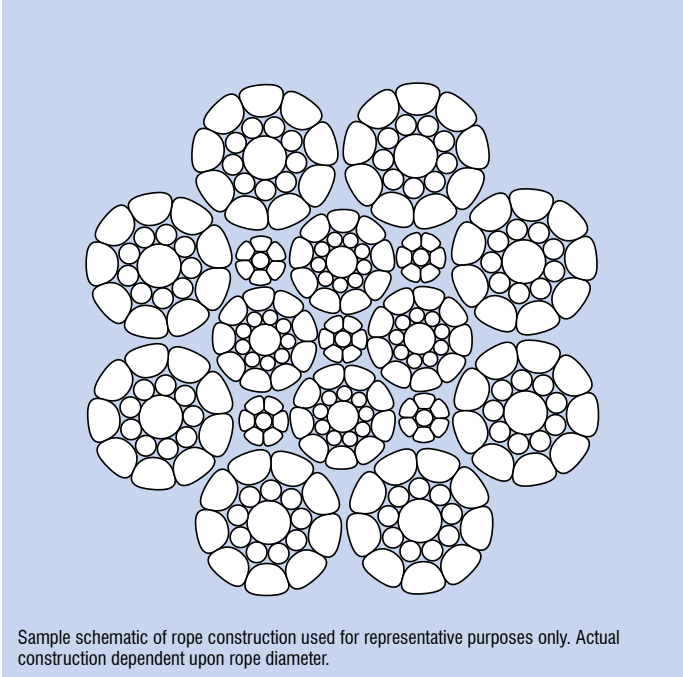

Nominal rope Ø mm	Weight Approx. kg/100 m	Minimum breaking force F _{min}	
		1960 N/mm ² kN	2160 N/mm ² kN
6,4	19,7	—	43,76
7	24,1	44,9	49,5
8	31,5	59,9	66
9	40	74,8	82,4
10	49	91,5	100,8
11	60	111,4	122,8
12	71	135,2	149
13	81	151,5	167
14	94	176,2	194,2
15	110	203,8	224,6
16	129	227,5	250,7
18	163	288,3	315,5

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info